


Plants for difficult to handle bulk materials

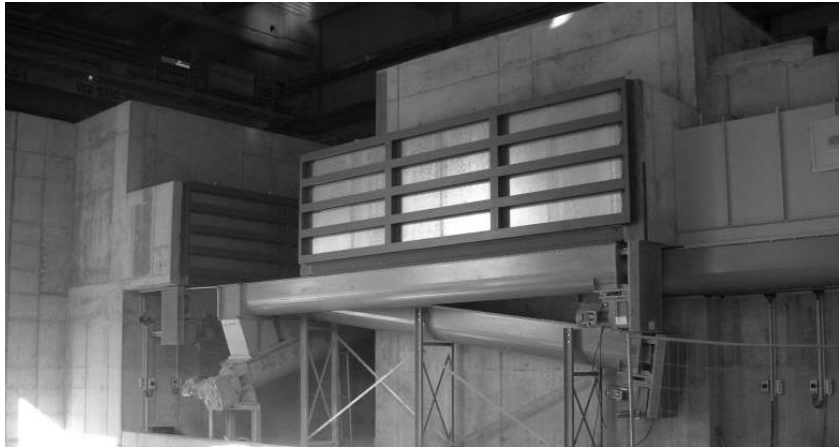

Woerth, Germany YEAR OF CONSTRUCTION 2007

DESCRIPTION

The external fuel system consists of several SHW live bottoms and a screw bottom, which feed different secondary fuels from the paper production consisting of paper, deinking and bio sludge together with plastic rejects, to the internal fuel system of a CFB.

TECHNICAL DATA

- > bulk material
rejects | deinking/getter | paper sludge | bio sludge
- > silo
190 m³ | 170 m³ | 92 m³ | 150 m³
- > silo dimensions
7.6m/6.3m/4m | 7.0m/6.1m/4.0m | 8.0m/4.6m/2.5m | 7.0m/3.7m /5.0m
- > discharge unit
push floor | push floor | push floor | screw bottom
- > discharge efficiency
50 m³/h | 50 m³/h | 15 m³/h | 50 m³/h
- > conveying technique/additional equipment
conveying screws

